

LINKAN

PROTECTIVE FILMS



Linkan UK & Ireland Ltd

Room F2, CityLab
4-6 Dalton Square
Lancaster
LA1 1PP
UNITED KINGDOM
Tel: +44 333 200 5156
Email: info-lki@linkan-group.com



Linkan North America, LLC

Woolworth Building
233 Broadway, Suite 2200
New York, NY 10279
Tel: +1 212 608 6500
Email: info-lkn@linkan-group.com



Panama Office & Showroom

Plaza Beverly.
Calle 4 Rio Abajo.
Local #13.
Tel: 2217699/2249962
Email: info-lkp@linkan-group.com




Linkan Zhuhai Ltd

Building 31-7, A2 Doorway Business Park,
No. 29 Xianggong Road, Hongwan,
Xiangzhou, Zhuhai,
Guangdong 519000, China
Tel: +86 756 2170771
Fax: +86 756 2170772
Email: info@linkan-group.com



Linkan Ltd

4th Floor, Hong Kong Trade Centre
161 Des Voeux Road,
SAR of Hong Kong,
China
Tel: +852 8114 2684
Fax: +852 3159 8467
Email: info@linkan-group.com

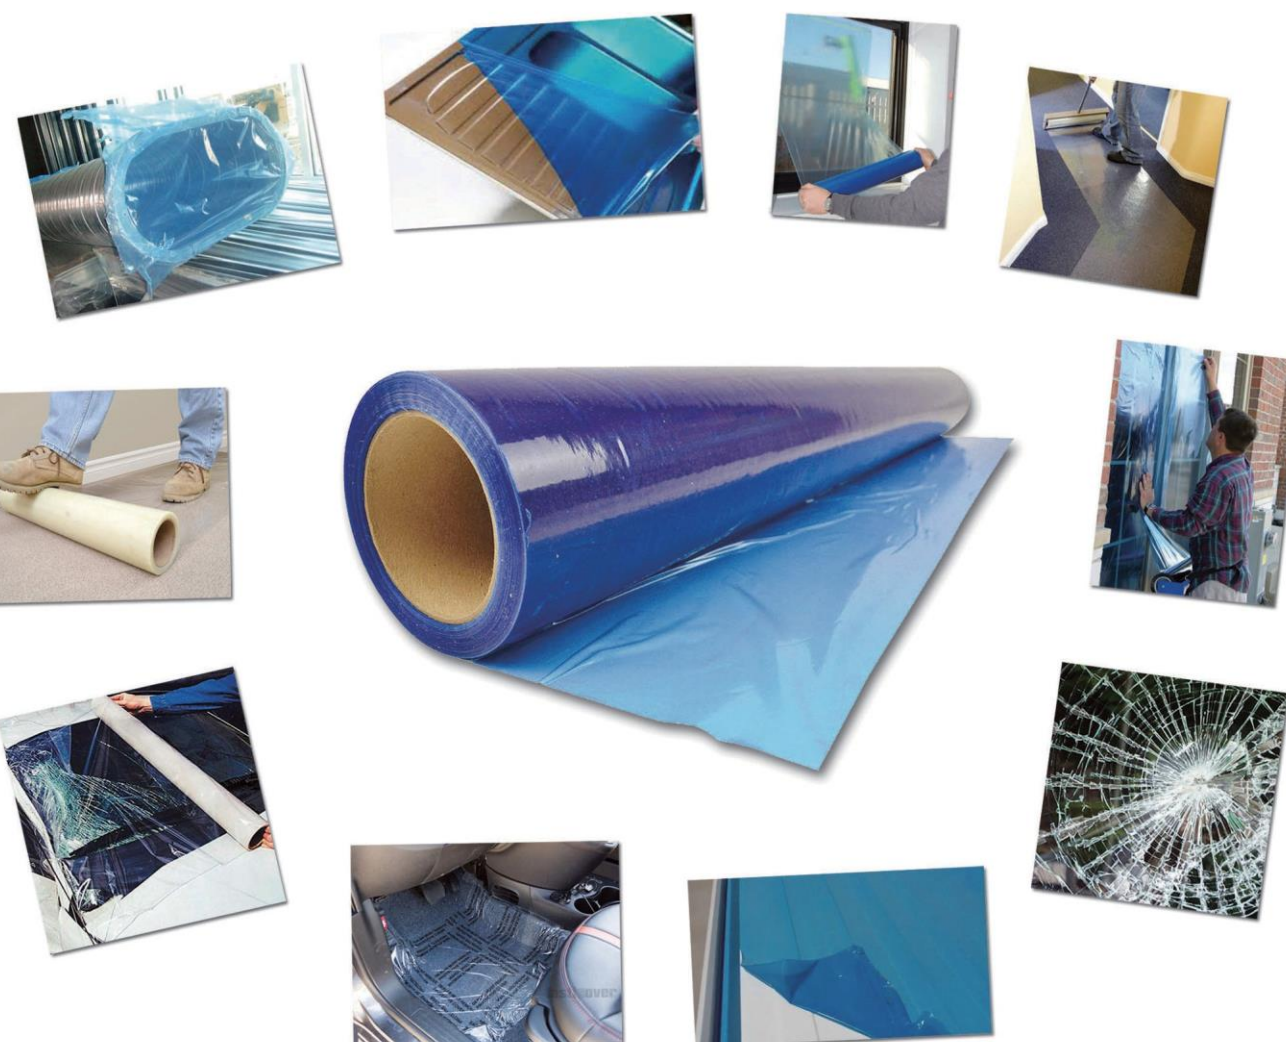

LINKAN



www.linkan-group.com

Our Factory

Our factory is one of the largest factories in the North of China that produces protective films. Their technicians have more than 20 years experience in producing protective films for various industries, specializing in the research, development and production of high quality protective film.

The factory covers an area of 5000 square meters, and has more than 100 employees, including an R&D group formed by several senior engineers who have more than 20 years of experience in the protective films industries.

They currently have 7 production lines including blow machines, coating machines, cutting machines, printing machines, etc. with a production capacity of 80-100 containers every month.



Carpet Protection

Temporarily protect your carpet with this self-wound plastic film from dirt or damage during construction, remodeling or painting. This carpet film has super high adhesion so it remains stable on the carpet. It is easy to remove, leaving no residue. Can be produced puncture resistant on request.

Normal Thickness: 50 microns, 70 microns, 90 microns

Roll size: 600mmx100m, 1000mmx100m

Product Code: LK-CP-1001



Multi Surface Protection

Multi Surface Protection Film is a tough, durable film with acrylic adhesive which is great for protecting hard floors, counter tops, tile, marble and more. Can produce with sticky side in or out as per request. It is convenient and economical to use, also can be removed without any residue.

Normal Thickness: 50 microns, 70 microns, 90 microns

Roll size: 600mmx100m, 1000mmx100m

Product Code: LK-MSP-1002




Window Glass Protection

Protect window glass and panels during construction, installation, painting, stucco application and so on with self-adhesive window glass protection film. The window glass film can be UV proofed for up to 30 days.

Normal Thickness: 38 microns, 50 microns, 70 microns

Roll size: 600mmx50m, 533mmx60m

Product Code: LK-WGP-1003

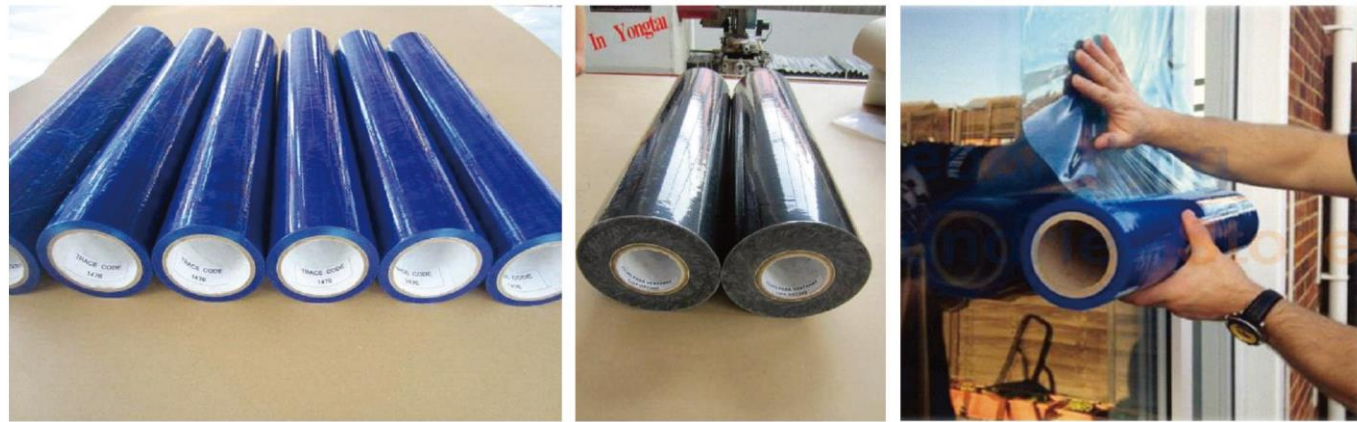

Auto Carpet Protection

Auto Carpet Protection Film is a multi-layer heavy duty polyethylene film that is easy to apply and remove printed with DEALER MUST REMOVE and perforated. The perforation allows it to be torn off by hand to produce square sizes more suitable for vehicles. Protects vehicles from unwanted mud, dust, paint etc.

Normal Thickness: 75 microns, 100 microns

Roll size: 609mmx60m, 533mmx60m, 609mmx152m

Product Code: LK-ACP-1004



HVAC Duct Protection

HVAC Duct protection film is a self-adhesive, high puncture resistance plastic film, which can be used on open duct during construction to temporarily protect any open ducting. With this film there is no need to use tape or strapping to secure and can be easily removed without leaving any residue.

Normal Thickness: 40 microns, 50 microns, 75 microns

Roll size: 609mmx60m, 533mmx60m, 609mmx152m

Product Code: LK-HDP-1005



Collision Wrap

Collision Wrap Film is an easy and cost effective way to prevent any loose items such as parts or glass coming away from damaged vehicles. It can also protect the interior of your vehicles from being damaged from water or dirt.

Normal Thickness: 75 microns, 100 microns

Roll size: 914mmx30m, 914mmx60m

Product Code: LK-CW-1006




Mirror Safety Backing – CATI (PE material)

Mirror Safety Backing Film-CAT 1 is a plain polyethylene film with high adhesion designed for mirrors to keep fragments together and reduce the risks of injury when mirrors are broken accidentally. Through high adhesion, the high performance pressure-sensitive acrylic adhesive make it easy to unwind and tight bond to the mirror. It meets the requirements for ANSI Z97.1-1984 and AS/NZS 2208:1996.

Thickness: 130microns, 150microns

Roll size: 369mmx200m , 629mmx200m, 1219mmx200m

Product Code: LK-MSB-PE-1007

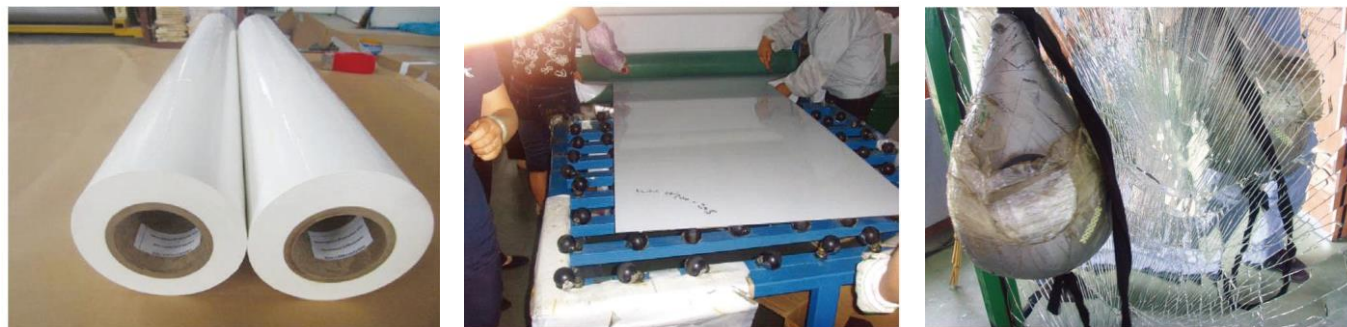

Mirror Safety Backing - CATII (PE woven material)

CATII mirror safety film is also shatter-sealed for mirrors to avoid human injury when mirrors are broken. But it is manufactured with a high tensile and impact woven polyethylene film with high performance acrylic adhesive. It is primarily recommended for mirrored wardrobe doors that require a Category II Mirror Safety Backing. Pass test as per ANSI Z97.1-1984

Thickness: 150 microns

Roll size: 369mmx200m, 629mmx200m, 1219mmx200m

Product Code: LK-MSB-WOV-1009



Mirror Safety Backing (PET material)

This film is constructed from high quality polyester (PET) based films, functional nano-coatings and paired with permanent acrylic adhesives to provide outstanding optical clarity. These films are barely visible when applied but they provide functional features, designed to make glass and mirrors safer, both by strengthening it against breakage and helping hold dangerous shards of shattered glass together in situations where breakage does occur.

Thickness: 70 microns, 100 microns, 200 microns

Product Code: LK-MSB-PET-1008



PET Material Protection

Optical grade protective film, uses environmentally friendly material PET as the substrate, coated with a special acrylic adhesive, so that it has a low but long term adhesion. It is easily removable, leaving no residue. It has high light transmission, high environmental resistance and is anti-static. Applications include flat panel displays, flat product surface protection, photo electrics, LCD monitors, touch screens, tablet PCs, cell phones, PDAs, and more.

Thickness: 50 microns, 75 microns, 100 microns

Product Code: LK-MP-1010



Painted Metal Protection


Protection of painted metal surfaces is important during stamping and shearing operations, as well as during transit and installation.

To help prevent surface damage to painted metal, our films can be applied to the metal coil after sheeting, prior to the metals being formed. It helps prevent dents, scratches and damage during shipping and processing.

Thickness: 50 microns

Roll size: 1200mmx500m, 1200mmx1000m

LK-PMP-1011

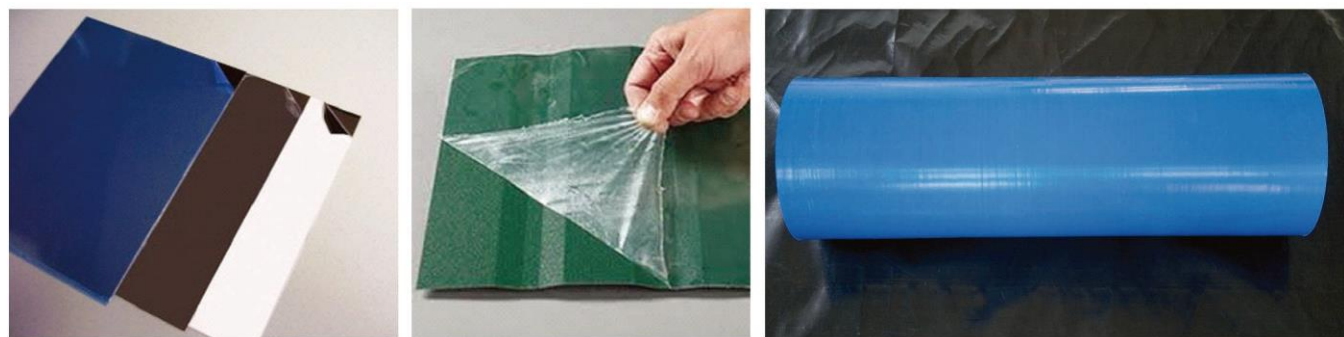


Stainless Steel Protection

We can offer a wide range of protective films for stainless steel, developed to preserve any type of surface finish, including: 2B, Scotch Brite, BA "Bright Annealed" or 3D.

Normal thickness: 50 microns, 70microns

Roll size: 1200mmx500m

LK-SSP-1013

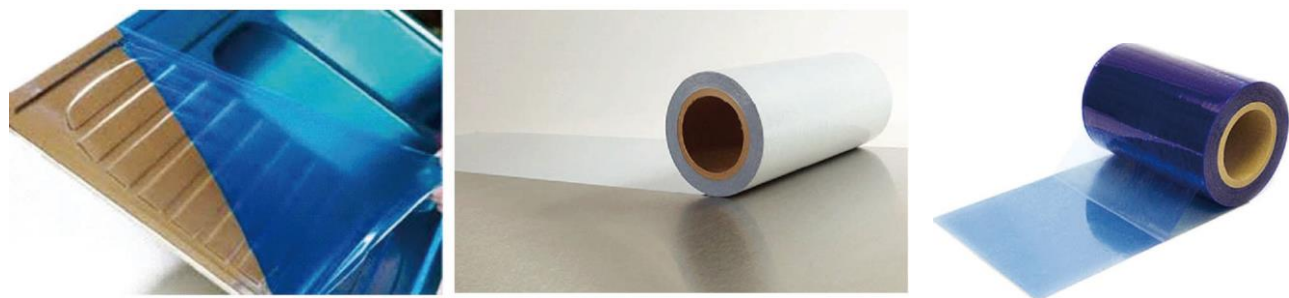

Self Adesive PE Protective Film

Self-adhesive PE protective film is specially designed for various product surfaces to provide temporary protection during the process of fabrication, production, transportation, storage. This self-adhesive PE protective film is easy to remove and won't leave residue.

Thickness: 35 microns, 50 microns, 70 microns

Roll size: 1000mmx200m, 1200mmx200m




PVC Plastic / Aluminium Extrusion Profile Protection

Our aluminium extrusion profile protection film offers stable adhesion strength, which is easy to use and leaves no adhesive residue behind after removal. It is mainly used for surface protection of aluminium alloy profiles, heat tinting sections, oxidation polishing sections, plastic profiles, plastic or steel door and window profiles, which can effectively prevent scratches and damage during transportation, storage and installation.

Normal Thickness: 60microns, 70microns


Colour: clear, blue, black and white

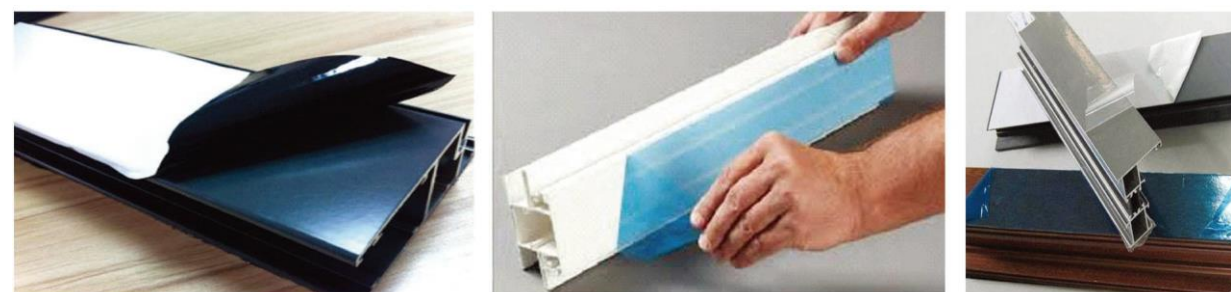

Aluminium Composite Panel Protection

This film is used by the aluminium and plastic panel industry. It is a layer of plastic film attached to the surface of the panel. The purpose is to protect the produced panel from damage during handling, transportation and installation. Therefore the surface of the panel is as clean as new. Available printed.


Thickness: 60microns, 70microns, 80microns
Printability: 1-3 colours with customized logo

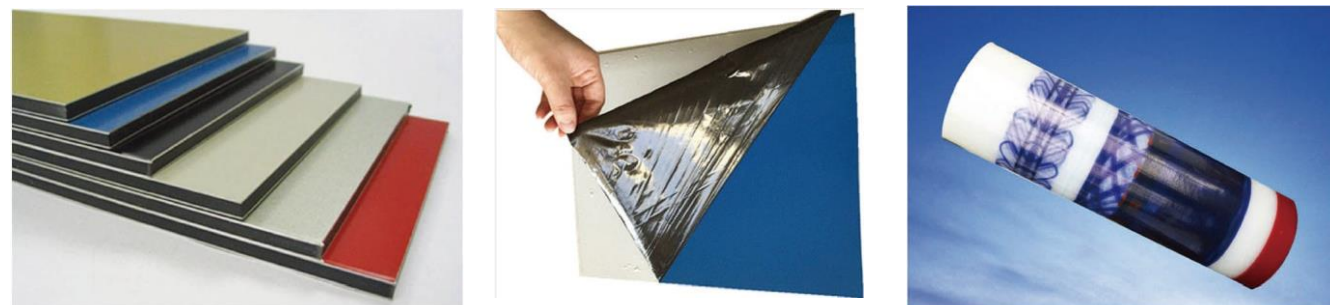

Application Tape/Transfer Tape

Application tape is also called transfer tape. It has a high tack formulation which allows vinyl letters and graphics to release easy and clean with no tearing, wrinkles, or glue strings. It is suitable for all sizes of letters and logos, easy peel, as well as matte and calendared vinyl. It offers extreme value for a perfect tear free, high quality transfer.

Colour: Clear or White

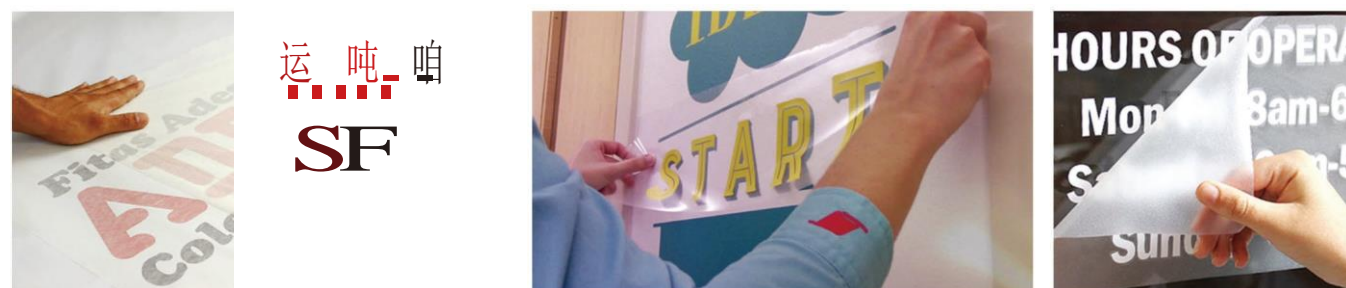

Stucco Masking Tape

Stucco Masking Tape is a UV resistant polyethylene tape used to temporarily mask surfaces during stucco application and painting. These tapes are often applied directly to window and door frames and sometimes used in conjunction with short term window protection films for added masking protection. It has a special synthetic high-tack adhesive which provides a watertight seal in severe environments and weather conditions and offers clean removal.

Roll Size: 51mmx55m
Colour: Red
UV Resistance: 30, 90 or 234 days



Clean Room Sticky Mats

Sticky mats are excellent in areas where high cleanliness is required. Especially in cleanrooms, manufacturing plants, hospitals, pharmaceutical production facilities and is highly effective in dust-removal.

Standard dimensions: 18 x 36, 18 x 45, 24 x 36, 24 x 45, 36 x 36, 36 x 45 and 36 x 60 inches

